



## Study – Prevention – Protection – Lightning

### Paraton@ir® 10

$\Delta t$ : 10  $\mu s$

Net weight  
1,800Kg

Packaging:  
260x180x110 mm


**LIFETIME WARRANTY\***

\* Contact@ir system needed  
see our Terms and Conditions



Colour has no influence on operation


### Protection radius

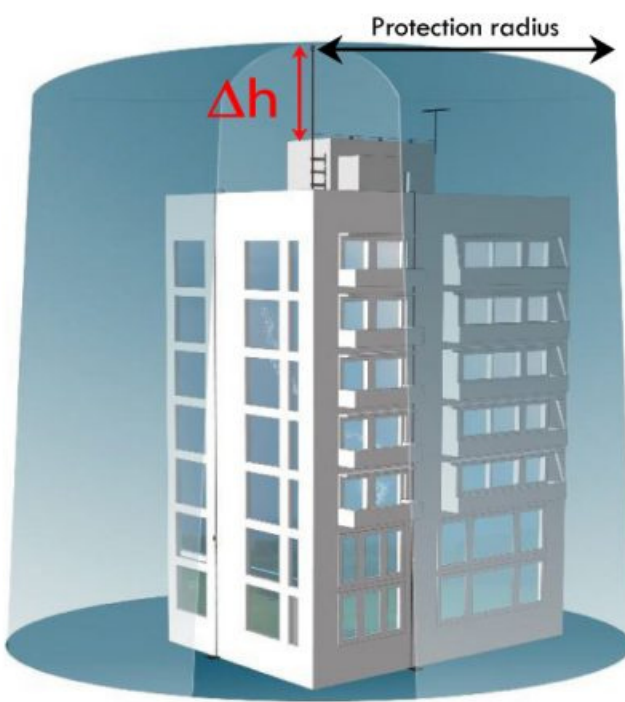

#### Protection radius in meters (m)

$\Delta h$ (m)	Protection levels			
	I	II	III	IV
2	10	12	15	17
3	16	19	23	26
4	21	25	30	35
5	26	31	38	43
10	28	35	42	49
20	30	39	49	57
60	30	40	53	70

In compliance with NFC 17-102 standard – Interpretation 007 April 2011. Datas validated by laboratory tests.

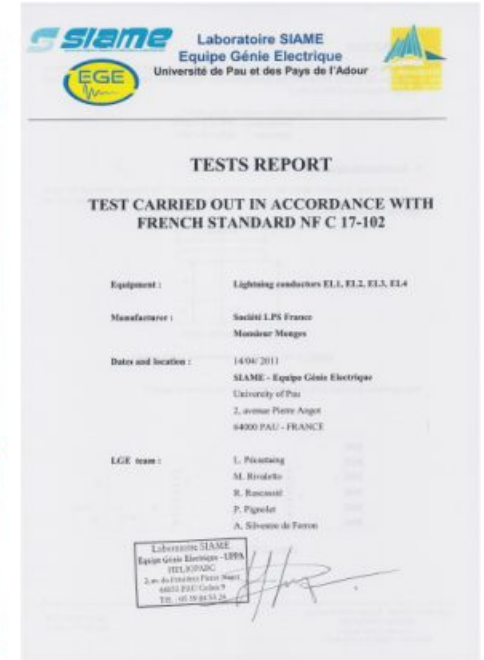

### Communication option

#### REMINDER

An outside protection against lightning with a lightning rod must be checked every year and after each lightning strike to ensure its good working order. Source NFC 17-102 – September 2011.



Contact@ir  
SYSTEM

#### To comply with this requirement :

A **Contact@ir®** emitter can be optionally fitted at any time on **Paraton@ir®10** as on any lightning rod of the range.

Then the **Contact@ir®** emitter permanently communicates the operating status as well as its communication reliability.

Used with the **Rout@ir®** option, it transmits an in-real-time warning when a lightning strike is picked up by **Paraton@ir®** and the lightning strike level.

