


10  $\mu$ s



25  $\mu$ s

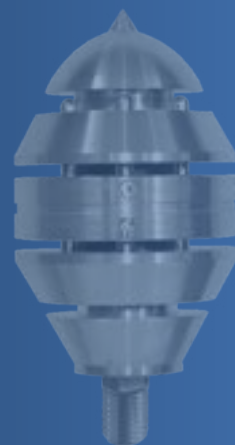


45  $\mu$ s



60  $\mu$ s

# Ellips<sup>®</sup> 1.0



Early Streamer Emitter Lightning Rod  
Triggering advance : 10  $\mu$ s



# Ellips<sup>®</sup> 1.0

Early Streamer Emitter Lightning Rod

EN-10005-E10



[www.lpsfr.com](http://www.lpsfr.com)

See the product



## Ellips<sup>®</sup> 1.0 Early Streamer Emitter Lightning Rod 10 $\mu$ s

The ELLIPS<sup>®</sup> (E.S.E.) lightning rod is the result of more than 10 years of laboratory and field research and experimentation.

Combining advanced materials and technology, the ELLIPS<sup>®</sup> lightning rod is a product designed to optimize your entire lightning protection.

Wired tester available with specific Test@ir<sup>®</sup> accessory.

Its aesthetic allows its integration in all projects.



# Ellips<sup>®</sup> 1.0

Early Streamer Emitter Lightning Rod

## Characteristics :

Reference	Triggering advance	Dimensions in mm	Weight in kg	Main axis
10005	10 $\mu$ s	200x100	1,568	M20

- Material: aluminum alloy and patented polymer materials
- Compliance with NFC 17-102:2011, UNE 21186, IEC 62305 standards and equivalent country standards

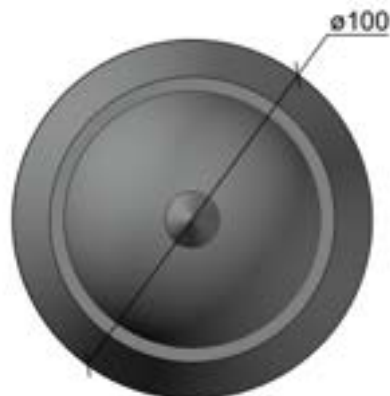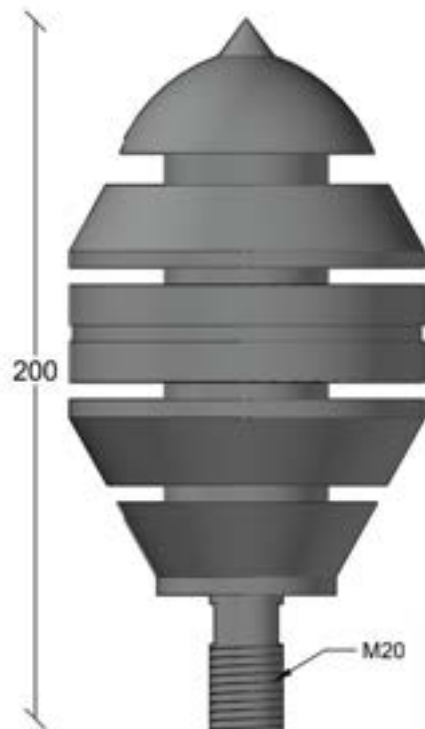

MADE IN FRANCE

www.lpsfr.com

See the product



# Ellips® 1.0

Early Streamer Emitter Lightning Rod

EN-10005-E10



**MADE IN FRANCE**

www.lpsfr.com

See the product



## Protection radius

The radius of protection of an Early Streamer Emitter Lightning Rod is related to its height (h) in relation to the structure to be protected, its effectiveness (triggering advance) and the level of protection determined beforehand.



### Level of protection

	I	II	III	IV
2	10	12	15	17
3	16	19	23	26
4	21	25	30	35
5	26	31	38	43
10	28	35	42	49
20	30	39	49	57
60	30	40	53	70

Radius in metres

Example: for  $\Delta h = 5$  m and protection level II, then the protection radius of Ellips® 1.0 (triggering advance = 10  $\mu$ s) is 31 m.



## The LPS Manager application

Allows you to simply calculate the protection level of a site and view the protection radius of the Ellips® 1.0 in situation.


# Ellips® 1.0

Early Streamer Emitter Lightning Rod

## Operating

### 1. Ellips® is charging:

The element called «charger» is designed to accumulate natural ions in the «Inductive Central System» (patented).

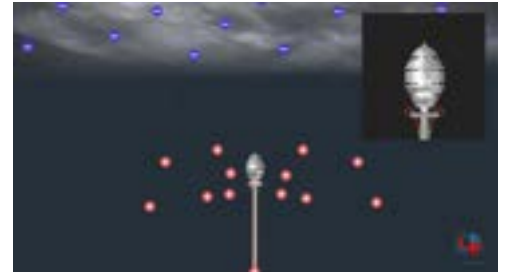


### 2. Ellips® creates a huge electric field:

Thanks to the «Central Inductive System» and the «Booster», Ellips® creates a gigantic electric field of charge opposite to that of the natural electric field present and stimulates the «Capture Head».



### 3. Capture and conduction by the Ellips® Early Streamer Emitter Lightning Rod:

The trigger of the Ellips® system attracts the descending tracer and creates the conditions for "lightning strike". The capture tip then guides the lightning current through its axis to the grounding conductors.

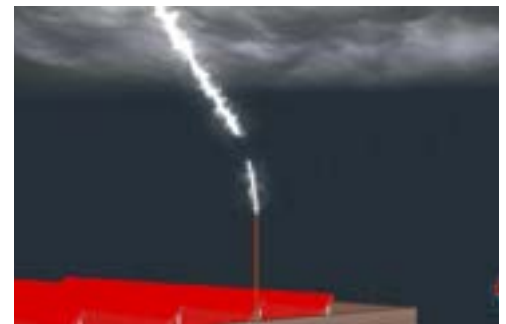

MADE IN FRANCE

[www.lpsfr.com](http://www.lpsfr.com)


See the product



# Ellips<sup>®</sup> 1.0

Early Streamer Emitter Lightning Rod

## Validation tests

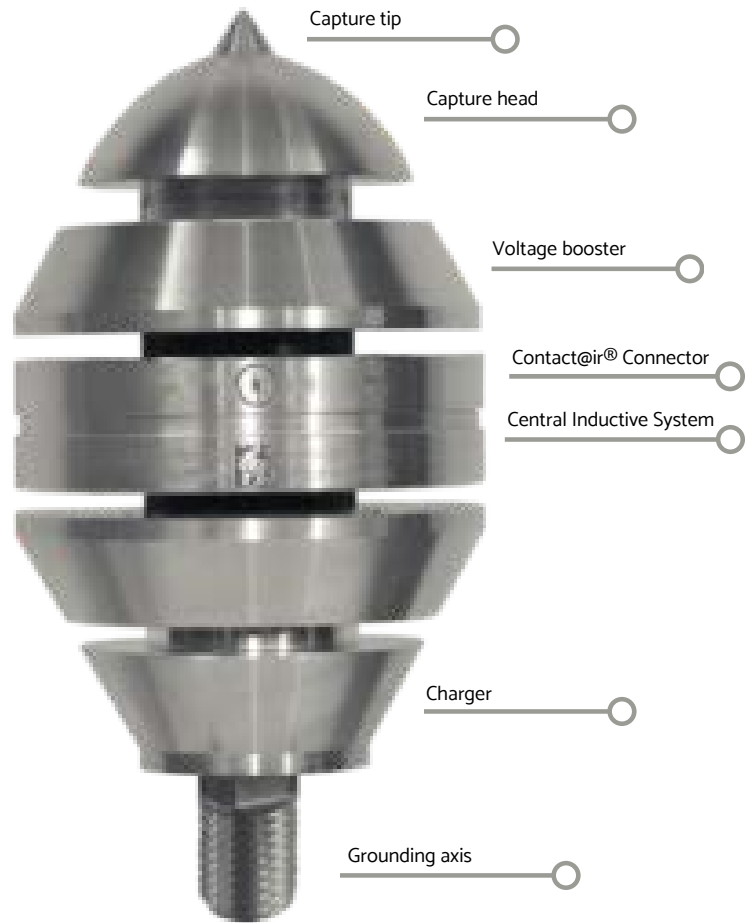

Compliant with the standards

NFC 17-102:2011  
UNE 21186  
IEC 62305

and to equivalent country standards



www.lpsfr.com

See the product



## Verification tests



Test@ir<sup>®</sup> is used to test the operation of Ellips<sup>®</sup> Early Streamer Emitter lightning rods.

This test requires the Ellips<sup>®</sup> lightning rod to be removed from its bracket.


EN-10005-E10



# Ellips<sup>®</sup> 1.0

## Early Streamer Emitter Lightning Rod

### Positioning :

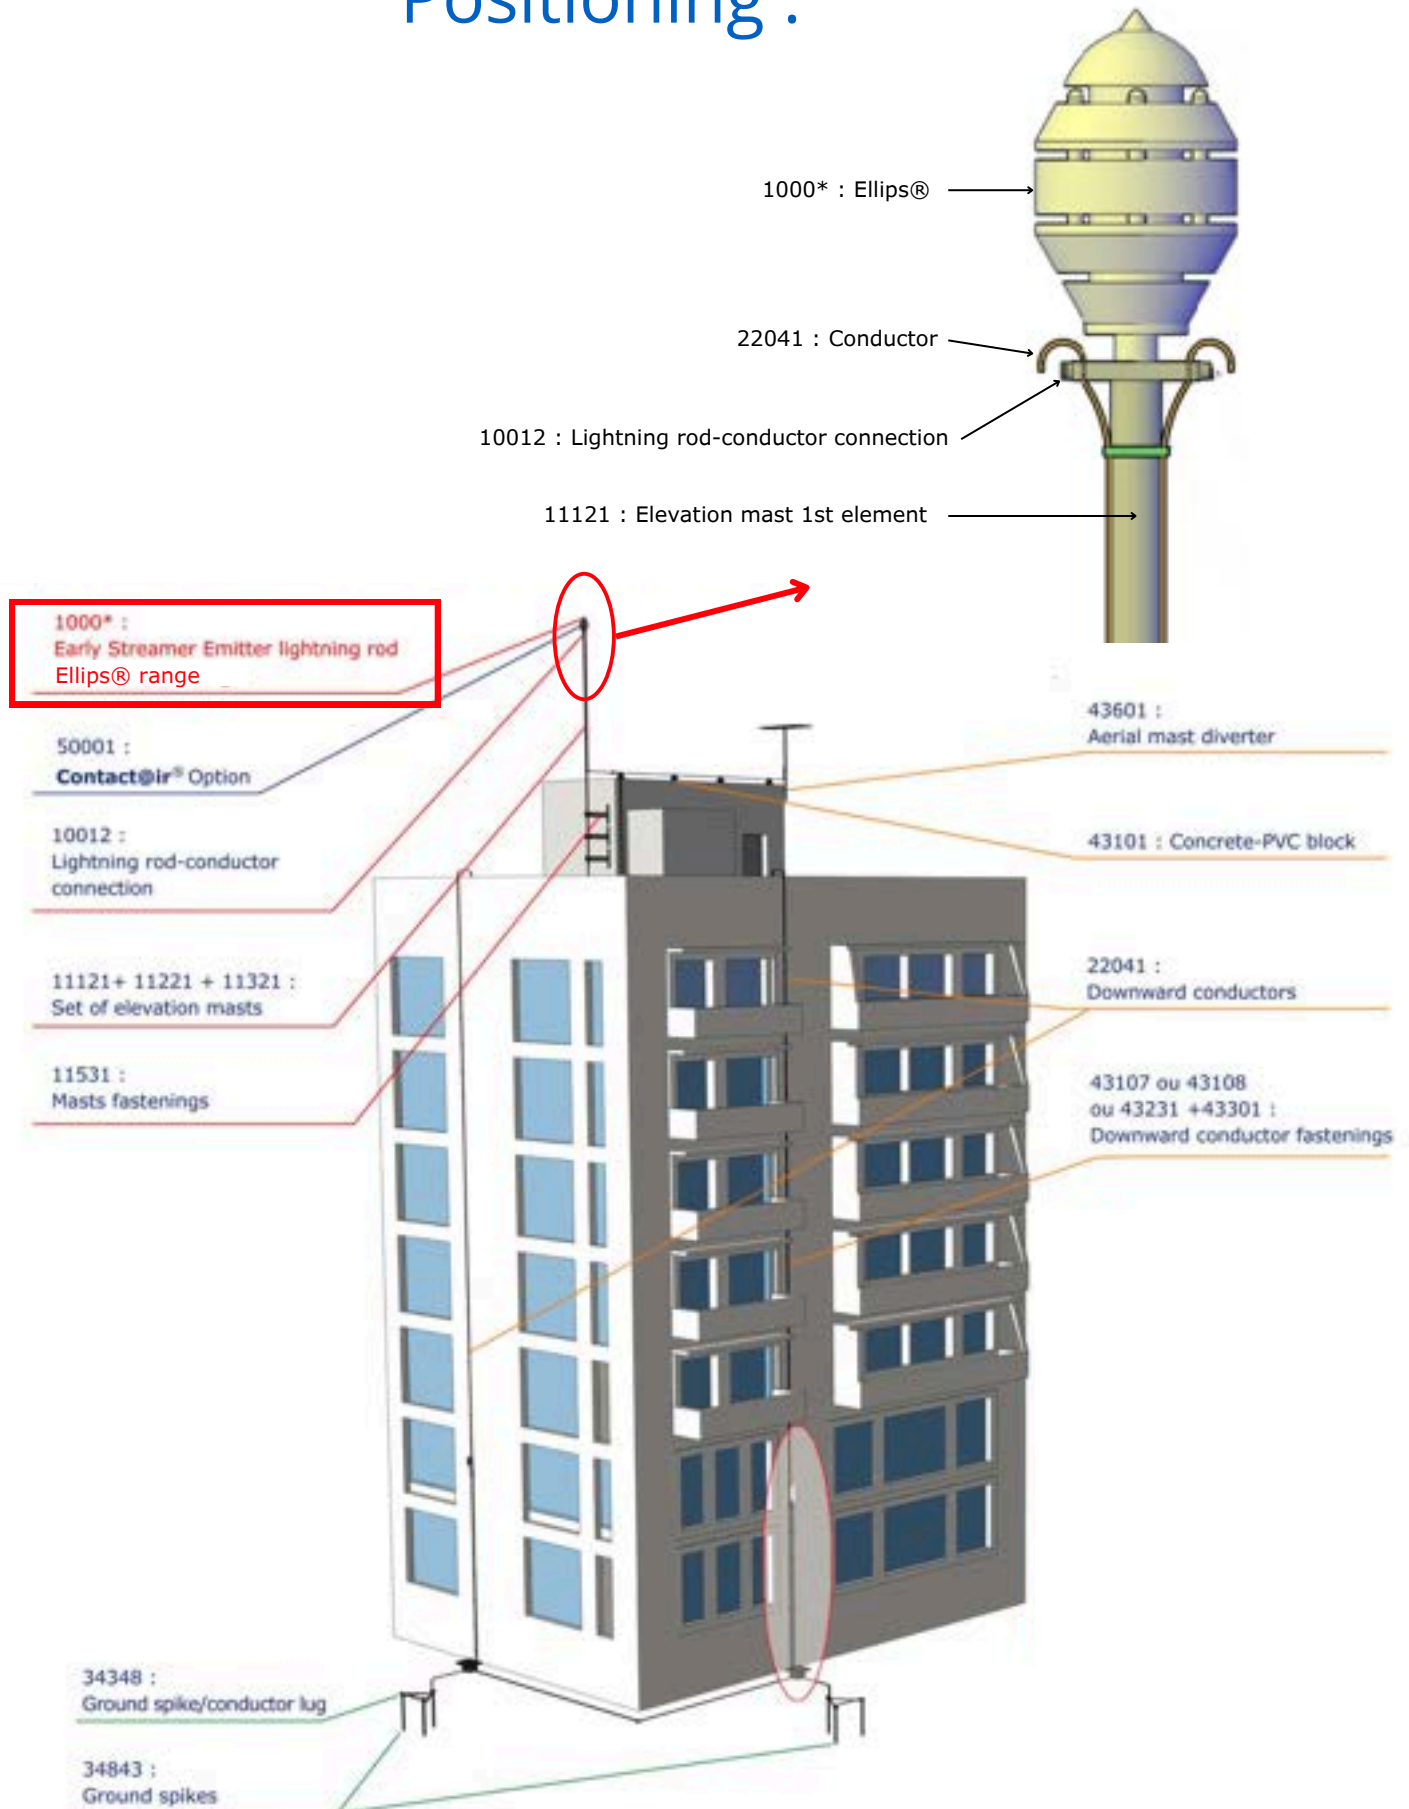


# Ellips<sup>®</sup> 1.0

Early Streamer Emitter Lightning Rod

## Your smart maintenance

Throughout the life of your lightning protection installation:

- Easily perform installation checks
- Meet standard maintenance requirements
- Preserve your manufacturer and installer warranties
- Ensure your safety
- Manage your installation from the LPS Manager application

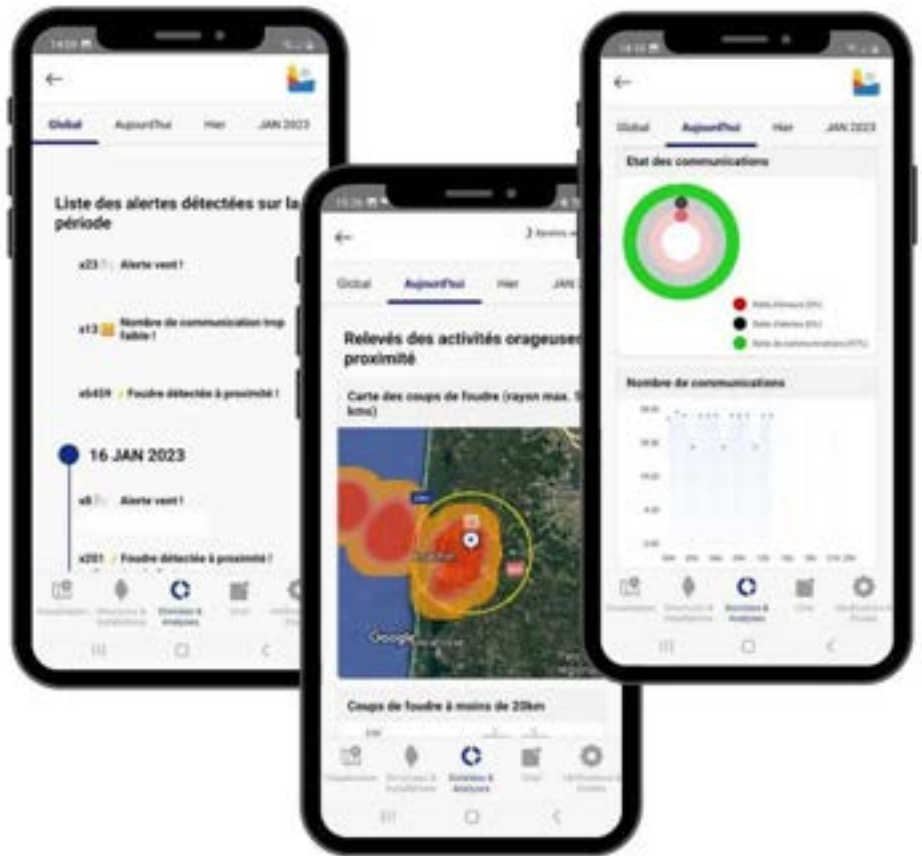

MADE IN FRANCE

[www.lpsfr.com](http://www.lpsfr.com)

See the product



[lpsmanager.io](http://lpsmanager.io)








# Ellips® 1.0

## Early Streamer Emitter Lightning Rod

### Permanent Monitoring of the installation

By adding a communicating counter (Compt@ir® or Alert@ir® XT):

- Working condition of the product
- Authenticity of the product
- Real-time alerts (lightning strikes, current measurement, product defect)
- Historization of information
- Management in the LPS Manager application



Contact@ir® MD

Contact@ir®  
+  
Rout@ir®

Contact@ir®  
+  
Dongle@ir®

Identification of the product

✓

✓

✓

Product test

✓

✓

✓

In real time alerts

✓

✓

✗

History

✓

✓

✗

Connectivity

✓

✓

✗

Autonomous power supply

✓

✗

✗

www.lpsfr.com

See the product



Contact@ir® System



# Ellips<sup>®</sup> 1.0

Early Streamer Emitter Lightning Rod

Monitor any lightning installations with Contact@ir<sup>®</sup> System

New or old installation, all brand, Choose:

ESE



Paraton@ir<sup>®</sup>



Compt@ir<sup>®</sup>



Alert@ir XT<sup>®</sup>

Example: for a new installation that requires remote monitoring, choose Paraton@ir<sup>®</sup> + a Contact@ir<sup>®</sup> System solution.

New or old installation, choose:

Simple Rod



Meshed cage



Tensioned cables



Compt@ir<sup>®</sup>



Alert@ir XT<sup>®</sup>

Example: for an existing installation of any kind, choose Compt@ir<sup>®</sup> or Alert@ir<sup>®</sup> XT + a Contact@ir<sup>®</sup> System solution.



www.lpsfr.com

See the product



Contact@ir<sup>®</sup> System



EN-10005-E10